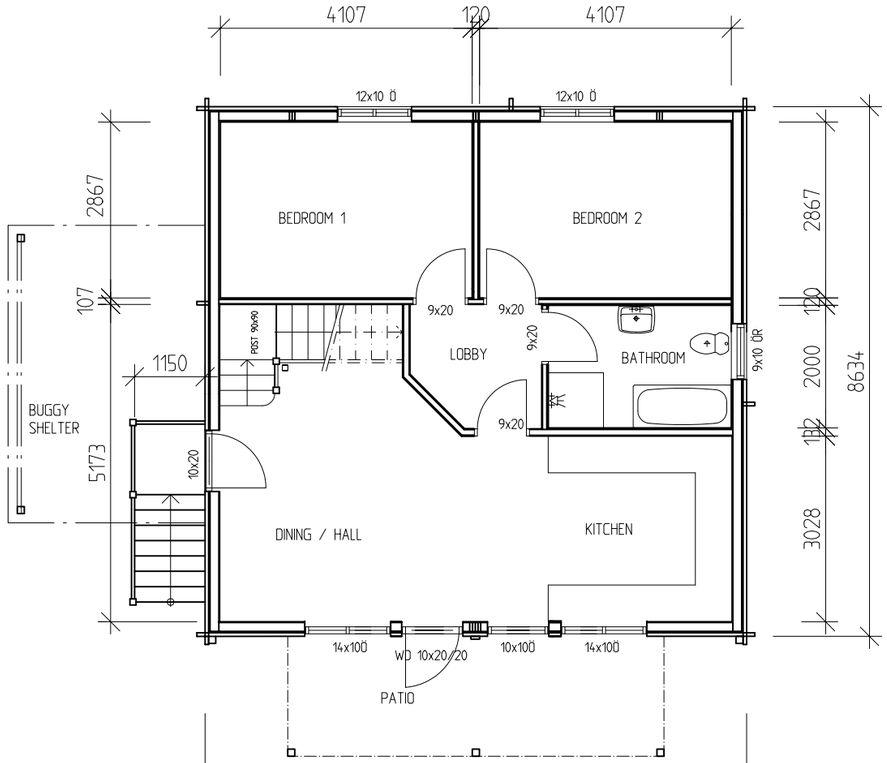

GROUND FLOOR

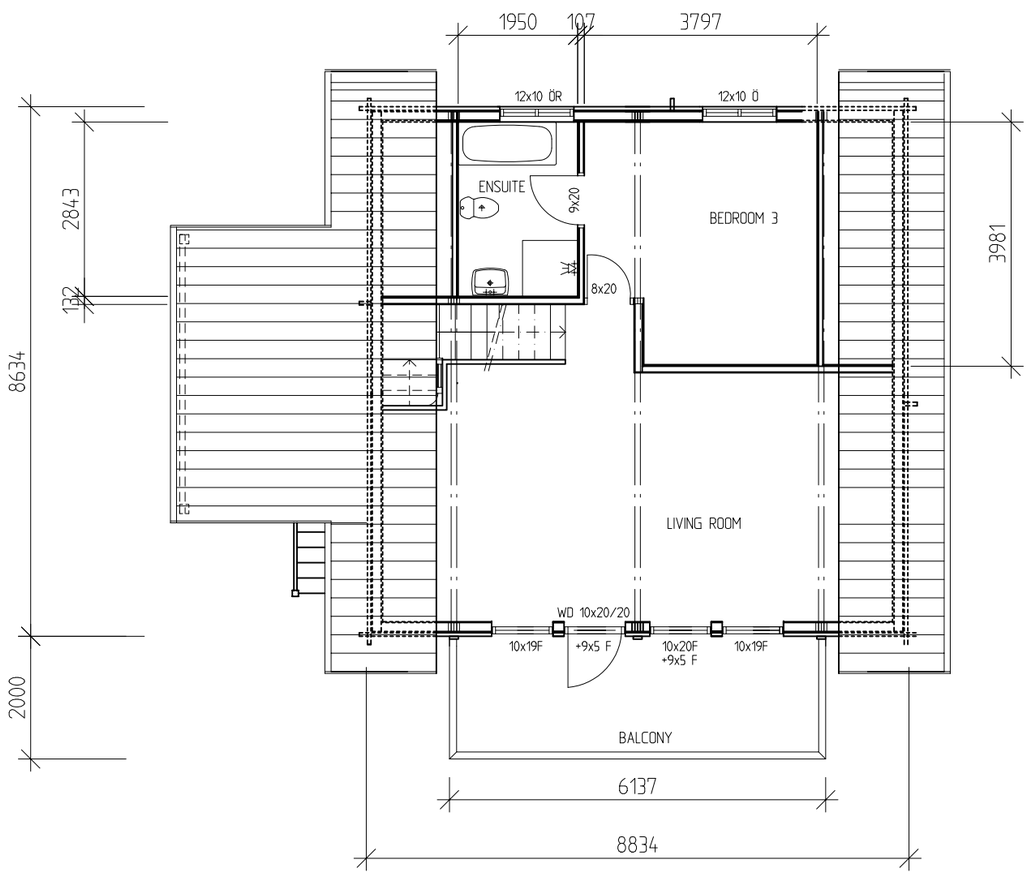

FIRST FLOOR

EXPLANATIONS

BYA		103,9 m²
BTA	GROUND FL.	76,3 m²
	FIRST FL.	50,6 m²
		126,9 m²
OPA	GROUND FL.	29,2 m²

TOTAL LIVING AREA INSIDE OUTER WALL

GROUND FL.	68,0 m²	
FIRST FL.	47,6 m²	RÄTTADE
TOTAL	115,6 m²	

MATERIAL:

ROOF
UNDERLAY FELT
17 TONGUE AND GROOVE BOARD
PURLINS 45x220+45x70 c1200
60 AIR VENTILATION
230 MIN.WOOLINSULATION WITH WINDSHIELD
VAPOUR CONTROL LAYER
SECONDARY SPACED BOARDING
28x70 c400
PANEL
90x405 L40 GLULAM BEAMS

INTER-MEDIATE FLOOR
22 FLOOR PARTICLE BOARD
L42x180 c400 GLULAM BEAMS
LOGPANELLING

BOTTOM FLOOR
22 FLOOR PARTICLE BOARD
45x195 FLOOR STUDS c400
195 INSULATION
BLIND FLOOR

OUTER WALLS
TIMBERPROFILE 58x145
19x70 LATH
INSULATIONPAPER
45x145 STUD FRAME
145 INSULATION
VAPOUR CONTROL LAYER
INTERNAL LOGPANELLING
OR BUILDING BOARDS

OR BUILDING BOARDS+GYPSUM

INNER WALLS

GROUND FL.
LOGPANELLING OR BUILDING BOARDS
45x70 STUD FRAME/45x95 STUD FRAME
LOGPANELLING OR BUILDING BOARDS
(GYPSUM WALLBOARD IN BEDROOM, BATHROOM AND UTILITY)

FIRST FL.
LOGPANELLING OR BUILDING BOARDS
45x70 STUD FRAME/45x95 STUD FRAME
LOGPANELLING OR BUILDING BOARDS
(GYPSUM WALLBOARD IN BEDROOM AND WC)

REMAINS
ILLUSTRATED INTERIOR FITTINGS
NOT INCLUDED UNLESS SPECIFIED
COMPARE WITH SUPPLIER DESCRIPTION

INSULATION AND PLASTIC FOIL/
TROGHTREADPROTECTION IN ROOF, OUTER WALLS
AND FLOOR ARE NOT INCLUDED IN STANDARD
DELIVERY, COMPARE WITH SUPPLIER DESCRIPTION

METER

0 1 2 3 4 5

BET	ANT	ÄNDRINGEN AVSER	SIGN	DATUM
A		OUTER DOOR AND OUTER STAIRS	J.A	2008-10-29

BUILDING DOCUMENT

TREFLOYNE PARK, PENALLY
TENBY, PEMBROKESHIRE

JABO

JABO WOOD PRODUCTS AB
Glslavedsvägen 18, 514 93 AMBJÖRNARP Tel. 0325 - 66 17 00

UPPDRAG NR	RITAD/KONSTR AV	UPPDRAGSLEDARE
3009-017	J.A	

DATUM / ANSVARIG
2008-09-02

PROPOSED HOLIDAY LODGE
T74144, SC39103
PLANS

SKALA A1/A3	NUMMER	BET
A3=1:100	A 01	A